


Assembly Instructions for the Base Stand for Cool Curling Board Components:


- 8 leg pieces (4 wide, 4 narrow)
- 2 skirt sides
- 2 skirt ends
- 24 #8 x 1³/₄" screws
- 4 leg-levelers with brackets
- 4 L-brackets
- 32 #6 x 5/8" screws
- 24 1¹/₈" washer head screws
- 1 (or 2) cup holders (optional)
- 4 (or 8) 1³/₄" screws (optional)

Assembly:

1. Assemble the 4 main skirting pieces by screwing the corners together with 12-#8 x 1³/₄" screws. Be sure to keep all of the finished edges to the bottom.

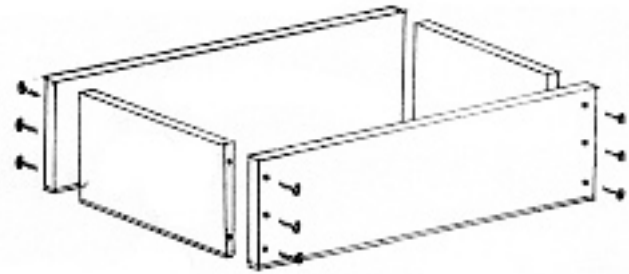


2. Assemble the 4 legs together by screwing the wider pieces to the narrower pieces using 3-#8 x 1³/₄" screws for each leg.




3. Attach the leg-leveler brackets onto the inside bottom of the 4 assembled legs using 4-#6 x $\frac{5}{8}$ " screws per leg. Thread the leg leveler into the bracket. *Note: The bottom of the leg is the end with the edge banding. The unfinished top leg edges are matched with the unfinished top edge of the table skirt.



4. Attach the 4 assembled legs to the assembled skirt using 3- $1\frac{1}{8}$ " washer head screws per leg, screwing from the inside of the skirt through the pre drilled holes and into the leg, assuring that the top of the leg and the skirt are flush. Using a power drill will make this process much easier.

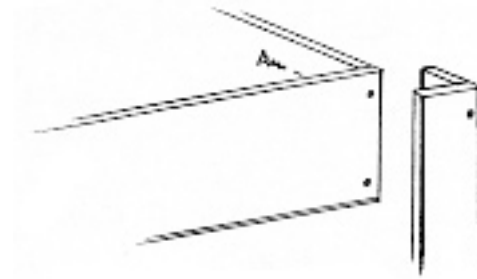

5. Using 2-#6 x $\frac{5}{8}$ " screws per L-bracket, attach the 4 L-brackets to the inside of the skirt, flush with the top of the skirt, and positioned approximately 1 foot from the ends.

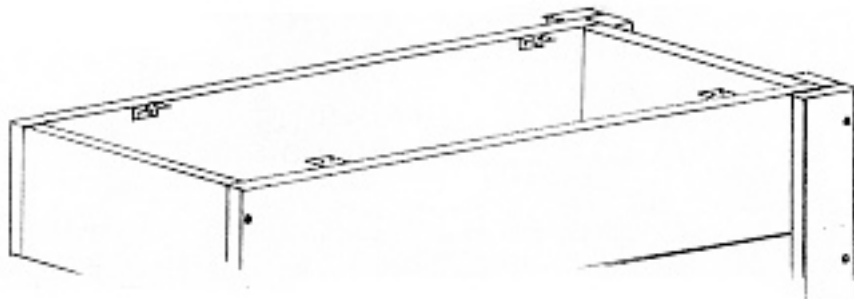

6. Set the curling board onto the base. After centering the curling board on the base, secure it in position using 2- $\frac{5}{8}$ " screws per L-bracket.
7. Set the table in the desired location in the room and level it, using the leg-levelers on each on the 4 legs.
8. If your base (stand) has been supplied with the optional cup holders, fasten them to the base at your desired location using the 2- $1\frac{3}{4}$ " screws per cup holder, screwing from the inside of the skirt into the cup holders.